



Technical Application Guide



E-BIKE

E-BIKE

High Performance Connectors




Anderson Power Products® (APP®) offers the safety and performance you expect from a connector for your E-BIKE application. Certified by UL standards ensures that your product will have the highest performance for your application.

SPEC Pak® connector series are rugged and environmentally sealed (IP68) certified connectors made from polycarbonate (PC) material, UL94 V-0 flame resistant and offering operating temperature of -20 to 105°C (-4 to 221°F). Available in wire-to-wire or wire-to-panel configurations. Utilizing the proven PowerMod® pin and socket technology for power, signaling or ground capabilities in applications demanding waterproof high power solutions.

Why Anderson Power Products®

Anderson Power Products® has established a reputation as being the leader for high quality products, on-time deliveries and excellent customer service. As a result of modern manufacturing techniques, rigorous quality control measures, best practice training and extensive testing we ensure our customers receive the quality products and service they deserve.


Anderson Power Products® is a leader in designing high quality connectors ideal for the following personal mobility markets and beyond:

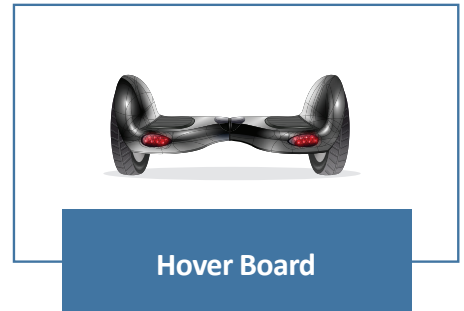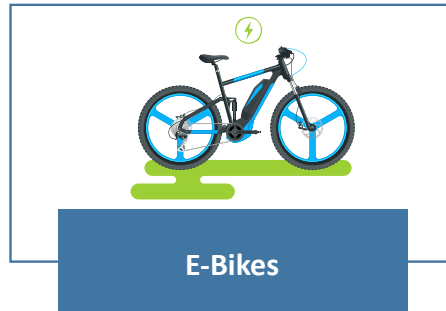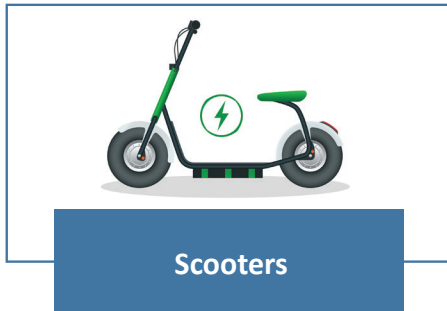

The PowerMod® contact series provide a low resistance connection and durable of up to 10,000 mating cycles. The high quality gold plated contacts are available in standard, premate and postmate sizes to allow for sequencing of circuits.

Male Contact

Female Contact

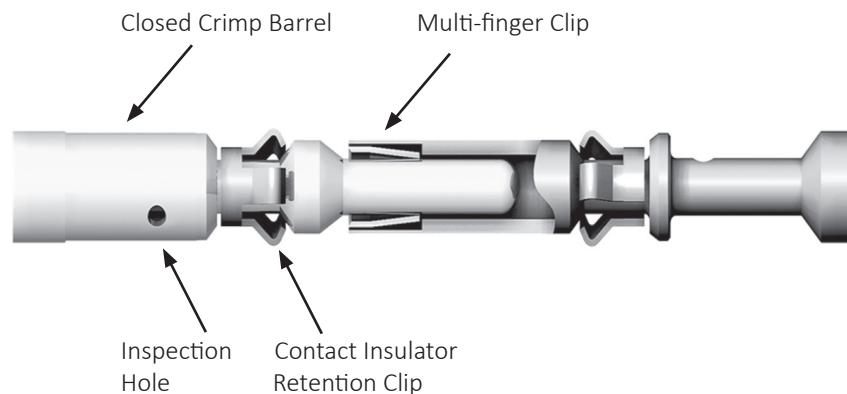



Male Crimp Contacts




Female Crimp Contact

Bringing Power and Signaling to Your Application

Anderson™ connectors are designed to work within your applications to bring power or power and signaling to and from the following equipment:

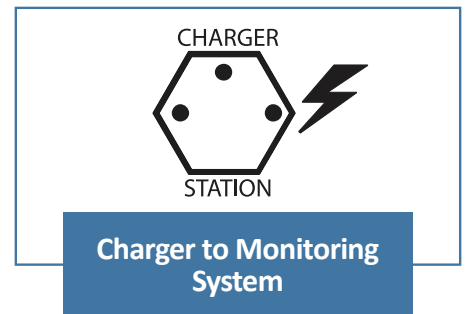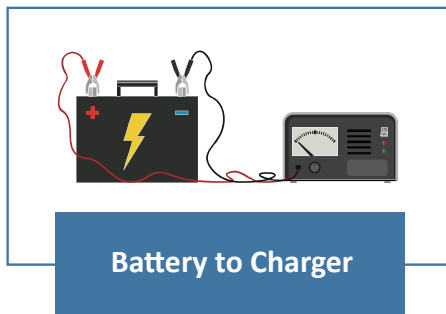

Design Consideration

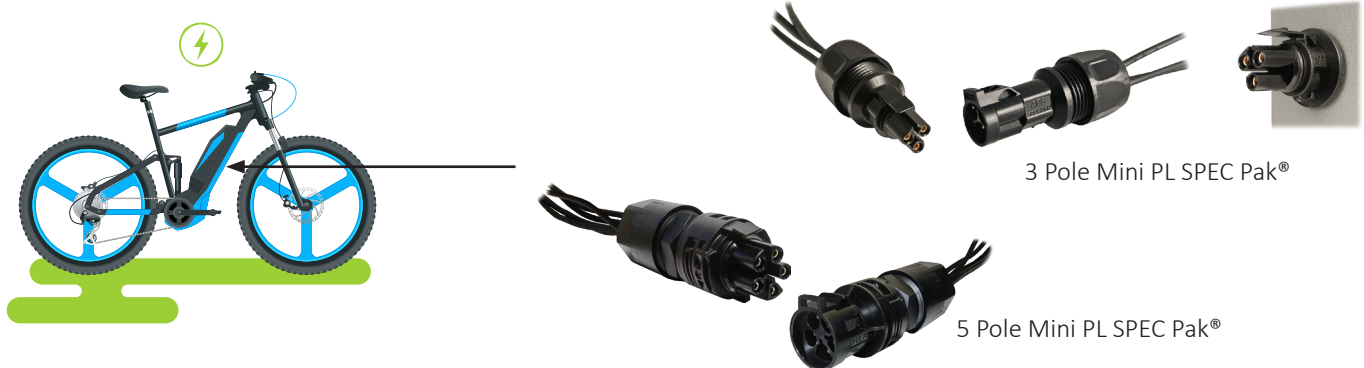

SPEC Pak®

SPEC Pak® offers power solutions that provide a sealed environment for watertight protection rated for IP68. See specifications on following page.

Price Effective Power Solution



Powerpole® 15/45 series connectors are the smallest of the Powerpole® family but capabilities up to 55 amps per pole. Can be used in applications requiring wire-to-wire or wire-to-board, accommodating wire sizes from 20 to 10 AWG (0.75 to 6 mm²).

Looking for a Blind Mate Solution?



Blind Mate Pak Connector is ideal for panel to panel, bulkhead to bulkhead, or rack mount applications that require the power connector to compensate for up to 0.45 in. (11.43 mm) of misalignment in either axis. Eight positions can be filled with Powerpole® 15/45 connectors. The receptacle side can be used with wire or PCB contacts.

For more information checkout our full catalog at

<https://www.andersonpower.com/content/dam/app/ecommerce/product-pdfs/CAT-PPMP.pdf>

Design Features



3 Pole Mini PL SPEC Pak®



5 Pole Mini PL SPEC Pak®

3 Pole Mini PL SPEC Pak®

Manual Release Latch

- Prevents accidental un-mating
- UL rated 22A

Pin & Socket Contact Technology

- Gold plated for greater conductivity

3 Pin Lengths Available

- Offers sequencing capabilities

Touch Safe per UL 1977 Sec. 10.2

- Touch safe on both pin & socket sides

Rugged & Environmentally Sealed Shells

- F1 weatherability rating per UL 746C
- V0 flammability rating per UL 94
- IP68, exceeds industry standards

5 Pole Mini PL SPEC Pak®

Manual Release Latch

- Prevents accidental un-mating
- UL rated 23A

Pin & Socket Contact Technology

- Gold plated for greater connectivity

3 Pin Lengths Available

- Offers sequencing capabilities

Touch Safe per UL 1977 Sec. 10.2

- Touch safe on both pin & socket sides

Rugged & Environmentally Sealed Shells

- F1 weatherability rating per UL 746C
- V0 flammability rating per UL 94
- IP68, exceeds industry standards

Don't see your market or the connector that meets your needs?

We invite you to contact our sales department at 978-422-3800 or check out our web store at www.andersonpower.com. We specialize in the design and manufacture of custom high current connection systems to meet specific customer requirements. Our expertise in high amperage connections, multiple types of contact technology and molded plastic insulators allow us to provide durable, high power connections that fulfill our customer needs.

Specifications

3 Pole Mini PL SPEC Pak®

ELECTRICAL		
Current Rating (Amperes)		
UL 1977	22	
CSA (30°C Rise)	16	
Voltage Rating		
UL 1977 (AC/DC)	600	
Dielectric Withstanding Voltage (AC)	2,200	
Contact Resistance (average)	3 Milliohms	
MATERIALS		
Shell	PC	
Latch	PC	
Flammability	UL 94 V-0	
Weatherability	UL764C / 12 mm, F1	
Contacts		
Socket Body	Copper Alloy, 200 μ inch Sn over Ni	
Socket Contact	Copper Alloy, 30 μ inch Au over Ni	
Pin	Copper Alloy, 30 μ inch Au over Ni	
MECHANICAL		
Environmental Seal		
IEC	IP 68	
UL	50E	
Wire Size		
AWG	24 to 12	
(mm²)	0.5 to 2.5	
Sealing Options	Sealing Gland	
Operating Temperature		
(°C)	-20 to 105	
(°F)	-4 to 221	
Mating Cycles (no load)	500	
Contact Retention Force		
(lbf)	10	
(N)	44	
Mating Force (nominal)		
(lbf)	5	
(N)	22	
Touch Safe (UL 1977 Sec 10.2)	Pass	
Latch Strength (nominal)		
(lbf)	24	
(N)	107	

NOTE: Sn = tin Ni = nickel Au = Gold

5 Pole Mini PL SPEC Pak®

ELECTRICAL		
Current Rating (Amperes)		
UL 1977	23	
CSA (30°C Rise)	16	
Voltage Rating		
UL 1977 (AC/DC)	600	
Dielectric Withstanding Voltage (AC)	2,200	
Contact Resistance (average)	3 Milliohms	
MATERIALS		
Shell	PC	
Latch	PC	
Flammability	UL 94 V-0	
Weatherability	UL764C / 12 mm, F1	
Contacts		
Socket Body	Copper Alloy, 200 μ inch Sn over Ni	
Socket Contact	Copper Alloy, 30 μ inch Au over Ni	
Pin	Copper Alloy, 30 μ inch Au over Ni	
MECHANICAL		
Environmental Seal		
IEC	IP 68	
UL	50E	
Wire Size		
AWG	24 to 12	
(mm²)	0.5 to 2.5	
Sealing Options	Sealing Gland	
Operating Temperature		
(°C)	-20 to 105	
(°F)	-4 to 221	
Mating Cycles (no load)	500	
Contact Retention Force		
(lbf)	10	
(N)	44	
Mating Force (nominal)		
(lbf)	3.5	
(N)	16	
Touch Safe (UL 1977 Sec 10.2)	Pass	
Latch Strength (nominal)		
(lbf)	34	
(N)	155	

NOTE: Sn = tin Ni = nickel Au = Gold

Certifications

Anderson™ connectors strictly follow applicable standards and certifications. The product complies with UL, CSA, IEC and RoHS.



Application Notes

- Modifications to the product will void all warranties. For warranty information, please visit www.andersonpower.com
- Users and installers are required to read and understand the supplied installation guides and warnings.
- Solid wires are not recommended.

HEADQUARTERS

Anderson Power Products®
13 Pratts Junction Road
Sterling, MA 01564-2305 USA
T: +(1) 978-422-3600
F: +(1) 978-422-0128

Your Best Connection™

JPCPT

675 Sycamore Dr.
Milpitas, CA 95035 USA
T: +(1) 408-526-9363
sales@jpc-pt.com
www.jpc-pt.com

CHINA

IDEAL Anderson Technologies (Shenzhen) Ltd.
Block A8, Tantou Western Industrial Park
Songgang, Baoan District
Shenzhen, P.R. China 518105
T: +(86) 755 2768 2118/3393 2388
F: +(86) 755 2768 2218

EUROPE

Anderson Power Products® Ltd.
Unit 3 Europa Court
Europa Boulevard
Westbrook, Warrington
Cheshire, WA5 7TN United Kingdom
T: +44 (0) 1925 428390
F: +44 (0) 1925 520203

TAIWAN

IDEAL Anderson Asia Pacific Ltd.
Taiwan Branch, 4F.-2, No.116
Dadun 20th St., Situn District
Taichung City 407, Taiwan (R.O.C.)
T: +(886) 4 2310 6451
F: +(886) 4 2310 6460

ASIA / PACIFIC

IDEAL Anderson Asia Pacific Ltd.
Unit 922-928, Topsail Plaza
11 On Sum Street
Shatin N.T., Hong Kong
T: +(852) 2636 0836
F: +(852) 2635 9036

INDIA

IDEAL INDUSTRIES India Private Limited
229-230, SPAZEDGE, Tower B
Sector 47, Sohna Road, Gurgaon – 122001
Haryana, India
T: +(91) 956 007 5905
www.ideal-industries.in

All Data Subject to Change Without Notice

AG-EBIKE-PACTECH REV 1

Anderson™ will use reasonable efforts to include accurate and up-to-date content in the data sheet. All product information contained in the data sheet including ordering information, illustrations, specifications, and dimensions, are believed to be reliable as of the date of publishing, but is subject to change without notice. Anderson™ makes no warranty or representation as to its accuracy. Content in the data sheet may contain technical inaccuracies, typographical errors and may be changed or updated without notice. Anderson™ may also make improvements and/or changes to the products and/or to the programs described in the content at any time without notice. Current sales drawings and specifications are available upon request.

©2020 Anderson Power Products, Inc. All rights reserved. APP®, A®, Anderson Power Products®, PowerMod®, SPEC Pak® and the APP Logo are registered trademarks of Anderson Power Products, Inc. Anderson™ and Your Best Connection™ are trademarks of Anderson Power Products, Inc.



VISIT US AT WWW.ANDERSONPOWER.COM